
## RESTORATION DURING PRIORITY PAGING OR ALARM


TOTAL LOUDSPEAKER LOAD MUST NOT EXCEED 300 WATTS LOUDSPEAKER LINES SHOULD BE FREE OF ANY EARTH



TOTAL LOUDSPEAKER LOAD
MUST NOT EXCEED 300 WATTS
LOUDSPEAKER LINES SHOULD
BE FREE OF ANY EARTH

DURING NORMAL SIGNAL
OPERATIONS, 24V IS DIRECTED TO
THE MVC.300RX TO MAINTAIN THE
CORRECT VOLUME CONTROL FUNCTION

DURING PRIORITY PAGING ANNOUNCEMENTS THE 24V IS REMOVED AND THE VOLUME IS RESTORED TO FULL




24V SUPPLY TO OPERATE THE VOLUME RESTORATION FACILITY

SIN


VOLUME CONTROL OF ALL SIGNALS INSTALLATION FEATURING SIMPLE

MUST NOT EXCEED 300 WATTS

BE FREE OF ANY EARTH



## CASE EARTHING ARRANGEMENTS

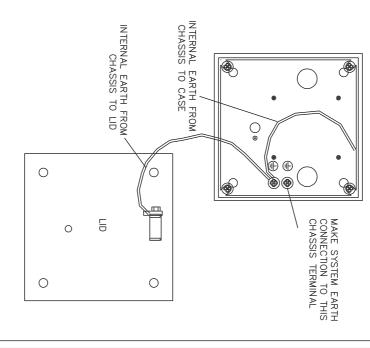

_	
	1
	7

data@mustang.co.ı				
Phone 01723-5825				
SCAPBOBOLICI	02-11-08		DETAILS FOR MVC.300RX ADDED	2
	21-01-08		DETAIL OF EARTH ARRANGEMENT ADDED	_
	APPD DATE	APPD	DESCRIPTION	REV

ł ENGLAND Y011 3UT 82555 Fax 01723—581673 co.uk www.mustang.co.uk ICATIONS LTD DRAWING TITLE

CUSTOMER REF

© 1998

COPYRIGHT MUSTANG COMMUNICATIONS LTD

DRAWN

TRACED

CHECKED

APPRVD

DATE

MVC.300RX VOLUME CONTROLS DETAILS FOR MVC.300R AND CONNECTION & APPLICATION

DRAWING No. MRT MVC-MF4 21-07-95